Engineering Systems

Byron A. Ellis – July 14, 2017



Often there is a lack of understanding as to what an engineering system is. Many confuse the performance of individual system elements with the performance or outcome of the system. "A system is a set or arrangement of interacting elements so related as to form an organic whole" (Menkes & Baldo, 1973, p.2).

The International Council on Systems Engineering (<u>INCOSE</u>) notes "A system is a construct or collection of different elements that together produce results not obtainable by the elements alone. The elements, or parts, can include people, hardware, software, facilities, policies, and documents; that is, all things required to produce systems-level results."


A system is an orderly grouping of interdependent components linked together according to a plan to achieve a specific objective. INCOSE points to Rechtin (2000) who states that the value added by the system, beyond that contributed independently by the parts, *is primarily created by the relationship among the parts; that is, how they are interconnected.*

To understand a system, it is helpful to visualize its boundary. According to Menkes and Baldo (1973) whatever lies within the boundary is called the system. The parts of a system can be physically attached or remote from each other. Analysis of a system requires disaggregating the whole system into its parts.

Systems can be open or closed. The simplest configuration of a system is:



The characteristics of a system are: organization, interaction, interdependence, integration and central objective. For instance, a local exhaust ventilation (LEV) used to control hazardous dust or vapors in the workplace is a system, involving a shroud or hood, duct or conduct, air filters, vacuum/blower, motor, and storage container, see image below. LEV is designed to capture an emitted contaminant at or near its source, before the contaminant has a chance to disperse into the workplace air (<u>OSHA</u>).

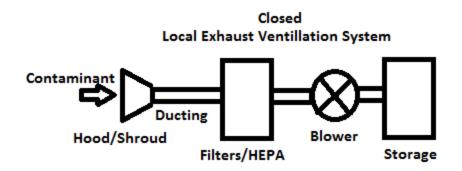

LEV is an engineering system designed to reduce employee exposure to airborne contaminants (dust, mist, fume, vapor, gas) in the workplace by capturing the emission at source and transporting it to a safe emission point or to a filter/scrubber.¹

The effectiveness of LEV depends on a leak-proof hood/shroud, adequate flow rate of air through the system, ducting without eddy currents and inefficient flow, high efficiency particulate filters and effective blower with totally enclosed fan cool (TEFC) motor. The material of construction must be compatible with the extracted contaminants.

References

Menkes, S. B. and Baldo, A. F. (1973). Analysis and Response of Linear Systems, The City College of New York.

Retchtin, E. (2000). System Architecting of Organizations: Boca Raton, FL. CRC Press.

Copyright of TJP is the property of The Jethro Project and its contents may not be copied or emailed to multiple sites or posted to a listserver without the copyright holder's express written permission. User, however, may print, download, or email articles for individual use.

¹ Local Exhaust Ventilation Guidance